

12/03/98



jc618 U.S. PTO

Express Mail Label No.: EL209574483US

Case Docket No.: 98 P 7501 US 01

Date: December 3, 1998

The Commissioner of Patents and Trademarks
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is a continuation-

in-part application of:

Inventor: Ramachandran et al.

For: REMOVAL OF POST-RIE POLYMER ON AL/CU METAL LINE

This application includes:

- 15 pages: specification and claims
4 sheets of drawings, formal/ X informal
 photographs (design patent application only)

Also enclosed is:

- X Declaration and Power of Attorney (2)
 Information Disclosure Statement pursuant to 37 CFR 1.56.

PRIORITY CLAIM

Pursuant to 35 U.S.C. 120, this application is a continuation-in-part of and claims the priority of copending U.S. Application Serial No. 09/061,565 filed April 16, 1998.

 Please abandon the parent application.

The filing fee has been calculated as shown below:

FOR:	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA	OTHER THAN A SMALL ENTITY RATE FEE	
BASIC FEE	XXXXXXXX	XXXXXXXXXX	XXXXXX	\$760.
TOTAL CLAIMS	12-20 =	1	x 18.=	\$0
INDEP CLAIMS	2 - 3 =	0	x 78.=	\$0
* MULTIPLE DEPENDENT CLAIM PRESENTED			+260.=	\$0
			TOTAL	\$760.

X Please charge my Deposit Account No. 19-2179 in the amount of \$ 760.00.
 A duplicate copy of this sheet is enclosed.

X The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 19-2179. A duplicate copy of this sheet is enclosed.


X Any additional filing fees required under 37 CFR 1.16.

X Any patent application processing fees under 37 CFR 1.17.

X The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 19-2179. A duplicate copy of this sheet is enclosed.

X Any patent application processing fees under 37 CFR 1.17.

X Any filing fees under 37 CFR 1.16 for presentation of extra claims.


 Stanton C. Braden
 Reg. No. 32,556

Siemens Corporation
 Intellectual Property Department
 186 Wood Avenue South
 Iselin, NJ 08830
 (732) 321-3150

98/30/21
9014202160
PTO U.S. PTO

09204706 120398

Express Mail Label No. EL209574483US

APPLICATION FOR LETTERS PATENT
OF THE UNITED STATES

NAME OF INVENTORS: RAVIKUMAR RAMACHANDRAN
9 HUDSON VIEW DRIVE
BEACON, NY 12508

WESLEY NATZLE
140 CANAAN ROAD
NEW PALTZ, NY 12561

MARTIN GUTSCHE
16 SLATE HILL DRIVE
POUGHKEEPSIE, NY 12603

HIROYUKI AKATSU
37 WELLINGTON COURT
YORKTOWN HEIGHTS, NY 10598

CHIEN YU
97 JEFFERSON STREET
HIGHLAND MILLS, NY 10930

TITLE OF INVENTION: REMOVAL OF POST-RIE POLYMER ON
Al/Cu METAL LINE

TO WHOM IT MAY CONCERN, THE FOLLOWING IS
A SPECIFICATION OF THE AFORESAID INVENTION

09204706 120399

REMOVAL OF POST-RIE POLYMER ON Al/Cu METAL LINE

BACKGROUND OF THE INVENTION

5

1. FIELD OF THE INVENTION

The invention relates to a improved process for removing post-RIE polymer rails formed on a Al/Cu metal line of semiconductor structures or microelectronic devices using a chemical mixture that contains an etching gas and an acid neutralizing gas. More specifically, the improvement process comprises removing the sidewall polymers left behind after the metal (Al/Cu) RIE process, using a mixture of an etching agent and an acid neutralizing reactant introduced either in a gaseous or plasma form, wherein the etching agent is a fluorine based species such as HF, and the acid neutralizing reactant is a chemical such as NH_3 .

2. DESCRIPTION OF THE PRIOR ART

In ULSI (ultra large scale integration) devices, the electrical connection between metal layers is achieved by sub micron via holes. These via holes are formed by cutting through interlayer dielectric (ILD) using anisotropic reactive ion etching (RIE) processes, usually with CF_4 or CHF_3 and with inert gas mixtures. The etch residue is non-corrosive and is easily removed.

During the RIE process of a composite structure having silicon oxide as the interlayer dielectric, a barrier layer, a metal stack layer, and a photo-resist, after exposure and development of the photo-resist, insoluble polymers that are mostly inorganic in nature form as sidewalls and some of the chemical constituents

are Al,Si,Ti,O, C and Cl. This residue is relatively corrosive and difficult to remove.

Currently, post metal RIE cleaning is done using a chromic-phosphoric acid tank bath or by other solvent based chemistry. Further, there is a certain time window of approximately 4 hours between completion of the RIE process and the wet cleaning step to avoid corrosion.

Some drawbacks of the currently existing wet chemical cleaning methods are as follows:

1) An acid based chemistry (without any HF in it) is not efficient in removing polymer rails that have high silicon content in them (as found in metal pads located in the support region); and

2) A solvent based chemistry generally takes a longer process time (approximately 10 minutes as compared to 2 to 4 minutes for a typical acid based clean) and typically is encumbered as a result of costs and environmental disposal requirements.

An apparatus for and method of accurately using a gaseous mixture of HF and NH_3 to etch precise amounts of silicon dioxide is disclosed in U.S. Patent 5,282,925. This method comprises: admitting a reactant containing gas into a vacuum chamber onto a substrate having a material to be etched to form a film of the reactant on the surface of substrate material; controlling the composition and residence time of the film on the surface of the material to be etched in an amount accurate of material on the substrate; and removing any unwanted reactant and reaction product from the chamber or surface of the substrate. The patent does not teach reaction with a complex mixture of silicon dioxide, aluminum dioxide, and carbon, or successful diffusion of ammonia and HF through the reaction products of the complex mixture.

U.S. Patent 5,129,958 discloses a method for cleaning a CVD deposition chamber in a semiconductor

0920406 12039

wafer processing apparatus comprising, contacting fluorine residues remaining therein from a plasma fluorine cleaning step with one or more reducing gases.

Pages 235-242 of the Electrochemical Society Proceedings Volume 95-20 by Tong et al., discloses removal of polymeric/silicate residues and reduction of contact resistance for inter-metal via holes by vapor phase HF cleaning. The vapor HF treatment reduces the metal-to-via contact resistance, due to the presence of AlF_3 , formed by the reaction between the vapor HF and the $\text{Al}/\text{Al}_2\text{O}_3$ at the via base. CF_4 or CHF_3 based RIE chemistry on an oxide field produces a polymer of low aluminum content without chlorides. Such a polymer is easily removed and is less corrosive than the one formed after aluminum RIE.

A process for removal of residues remaining after etching a polysilicon layer in formation of an integrated circuit structure is disclosed in U.S. Patent 5,296,093, wherein, in lieu of removing polymerized silicon/oxide-containing residues by dipping previously RIE etched structure into a HF bath, the RIE etched structure is treated with an aqueous ammonium-containing base/peroxide solution after completion of the RIE etch to remove such residues.

There is a need in the art of cleaning RIE etched materials to lessen the time window of about 4 hours between the completion of the RIE process and the wet clean step.

Putting it another way, there is a need to avoid the time coupling between RIE and wet clean and to avoid the use of a wet chemical clean in the art of reactive ion etching (RIE) processes which form metal lines by cutting through metal stack by virtue of anisotropic reactive ion etching (RIE) processes.

09204706.120393

SUMMARY OF THE INVENTION

One object of the present invention is to remove post-RIE polymer rails formed on a Al/Cu metal line by
5 employing a mixture of etching gas and an acid neutralizing gas as a gas clean.

Another object of the present invention is to provide a metal etched post clean process that does not involve the use of wet chemicals.

10 A yet further object of the present invention is to provide a post metal etch process by using a gas phase chemistry that eliminates both the use of wet chemicals by using only deionized water (DIW) and the time window or span that currently exists between a
15 metal etch and clean.

A further object yet still of the present invention is to provide removal of post-RIE polymer rails formed on a Al/Cu metal line by using gas phase chemistry that uses a fluorine based etching agent such
20 as HF and an acid neutralizing chemical such as NH_3 .

Another object yet still of the present invention is to provide a process for removal of post-RIE polymer rails on the metal line of Al/Cu by chemically modifying the polymer rails into a water-soluble form
25 by a gas mixture of HF and NH_3 and then remove the water soluble form of the polymer rails using a deionized water rinse.

A still further object of the present invention is to suppress the corrosion of the metal Al/Cu line by
30 removing the post-RIE polymer rails by neutralizing the active chloride component in the rails that causes corrosion by either neutralizing the chloride component with NH_3 or exchanging the chloride component with fluoride.

35 Another object of the present invention is to effect removal of the post-RIE polymer rails formed on a Al/Cu metal line by using integrated process that

090406 1233 0502T 904060

eliminates both the use of post wet chemical and the time delay involved between the RIE and the wet clean step, and thereby streamline the production process at the metal etch level.

5 In general, the invention is accomplished by avoiding the time coupling between RIE and wet clean and the use of a wet chemical clean, by introducing a mixture of a etching agent and an acid neutralizing reactant, either in a gaseous or a plasma form, after
10 the metal etch process, to chemically modify into a water soluble form, the post-RIE polymer rails and thereby suppressing the corrosion of the metal line, eliminating the time coupling between RIE and wet clean, and also eliminating the use of the wet chemical
15 clean as well.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing sequence 1 of
20 the present invention, wherein, from sequence 1, the RIE polymers are first converted into a water soluble chemical form in step 2, and during step 3, the RIE polymers in water soluble chemical form are removed. At step 4, the remaining photo-resist is removed by either
25 a plasma process or a chemical down stream etching method. Since this step usually takes place at temperatures greater than 200°C, a passivation layer forms on the Al metal line surface. As shown in Figure 1, the sequence of steps illustrated can take place
30 within integrated metal etch tool 5 which provides RIE of metal lines, removal of photoresist, removal of sidewall residues and associated processing.

FIG. 2 is a block diagram which can take place
within tool 5, depicting an alternative embodiment of
35 the invention, wherein, step 2 is used to remove the photo-resist in the strip chamber. This process is done with a water-only plasma at a low temperature of about

175-200°C thereby limiting the thickness of the sidewall polymer. The polymer rails are chemically modified in step 3 and rinsed off with DIW in step 4.

FIG. 3 are microphotographs showing the array and support region photos resulting from the process of sequence 1, where a mixture of HF+NH₃ is used to remove polymer rails of BCl₃ RIE etching of an Al/Cu metal line, followed by rinsing and plasma stripping of polymer.

FIG. 4 is a microphotograph of an alternative embodiment or sequence 2 of the invention wherein, photos of the array and support region are shown as a result of removing polymer rails of BCl₃ RIE etching of an Al/Cu metal line followed by a water based downstream plasma and, after subjecting said rails to a mixture of HF+NH₃ and rinsing.

DETAILED DESCRIPTION OF THE INVENTION

The foregoing and other objects and advantages of the invention will be better understood by resort to the following detailed description of the preferred embodiments of the invention.

After the metal etch process, a gas phase chemistry is utilized to eliminate both the use of wet chemicals by using only deionize water (DIW) and the time window that exists between the metal etch and clean.

Further, in the invention process, a method for integrating the use of the gas phase chemistry with the metal etch tool is provided, wherein the gas phase chemistry uses a fluorine based etching agent such as HF and an acid neutralizing chemical, such as NH₃.

Through experimentation, it was discovered that the Al, Ti, and C in the complex sidewall mixture following metal RIE do not inhibit the reaction of ammonia and HF with silicon dioxide nor do they inhibit

diffusion of ammonia and HF through the solid reaction product which is formed. The post-RIE polymer rails on the Al/Cu metal line are first chemically modified into a water soluble and less corrosive form by the gas mixture, which is then removed using a deionized water rinse.

While not desirous of being bound by any theory as to how the invention is accomplished, it is nevertheless believed that the chlorine component in the polymer rails is the active species that enhances corrosion, and that the chloride part of the polymer rails (either as free Cl⁻ or HCl) is either neutralized with NH₃ or exchanged with fluoride, and that this chemical interaction is responsible for suppressing the corrosion of the Al/Cu metal line.

By use of the invention method, the polymer rails are removed in an integrated process wherein, the metal etch-gas chemistry-DIW based clean, eliminates both the use of a post wet chemical and the time delay involved between the RIE and the wet clean step. Accordingly, this integrated invention process streamlines the production process of microelectronic devices at the metal etch level.

25



EXAMPLE 1

After the metal (Al/Cu) RIE process on a composite structure comprising a silicon oxide interlayer dielectric, a barrier layer, a metal stack layer, and a photoresist layer, dry wall polymers rails remain that are mostly inorganic in nature, and some of the chemical constituents of the rails are Al, Si, Ti, O, C, and Cl.

Both the time coupling between RIE and wet clean and the use of a wet chemical clean is avoided by introducing into the reaction chamber, a mixture of an etching agent and an acid neutralizing reactant, either

in a gaseous or in a direct or remote plasma form. The etching agent containing the fluoride based species is hydrofluoric acid and the acid neutralizing chemical is ammonia gas.

5 The etching agent reacts with the sidewall polymer rails and converts them into another chemical form that is easily removed, and the chemical reaction for this segment of the process is as follows:




The acid neutralizing chemical effectively takes care of any acid species that may be present, such as HCl, which is the etchant gas used during the metal RIE process or that may form due to the reaction of free chlorides with water.

15 The neutralization reaction is as follows:




20 The products from both the etching and neutralization reaction are soluble in deionized water.

If the above reactions do not occur, then the sidewall can trap chlorine and water species. This could result in a corrosion cycle where the chlorine acts as a catalyst.



followed by a hydrolysis reaction,



with the HCL being cycled back to reaction [4].

30 These kinds of reactions give rise to the small time window between metal RIE and the sidewall removal which is needed for corrosion.

Reactions [1]-[3] are especially advantageous to prevent reactions [4]-[5], because gaseous H_2O is not required to induce the HF reaction with the oxides and because the low reaction pressure (under 10 mTorr) enables the H_2O reaction product to escape. The low reaction pressure also enable easy integration of a

0904706 120359

chamber designed to carry out reactions [1]-[3], with the metal RIE process tool. The vacuum chamber may be interfaced with the metal etch tool or could be left as a stand-alone chamber for introducing the reaction mixture.

Reference is now made to FIG 1. where step 1 of one embodiment of the invention involves the use of metal etch chemistry in which there is no change from existing methods (reactive ion etching [RIE]).

Accordingly, sequence 1 of the first embodiment of the invention involves the use of a metal etch well known in the prior art; however, step 2 of sequence 1 of the first embodiment as shown in FIG. 1, requires the gas phase chemistry in order to obtain the two sequences and the process integration wherein, after the RIE polymers are converted into a water-soluble chemical form by a mixture of HF and NH₃ to obtain a water soluble chemical. The water soluble chemical is rinsed in deionized water, whereupon the soluble chemical materials are removed. At step 4, the remaining photo-resist is removed by either a plasma process or a chemical down stream etching method. This step takes place at temperatures greater than about 200°C and a passivation layer forms on the aluminum metal line surface.

EXAMPLE 2

In this embodiment of the invention or sequence 2, step 1 involves the use of a metal etch chemistry such as that described in Example 1 on a composite structure comprising a silicon oxide interlayer dielectric, a barrier layer, a metal stack layer, and a photoresist layer. At step 2 for sequence 2, a water-only plasma process is employed in the reaction chamber to strip the photo-resist; whereupon the formed polymer rails are chemically modified in step 3 by treatment with a

mixture of the hydrogen fluoride etching gas and the acid neutralizing gas, ammonia. Thereafter, deionized water is used to rinse off the water soluble chemical materials formed from the sidewall polymers in step 4.

5 It should be understood that, for the embodiments in both sequences 1 and 2 as shown in FIGS. 1 and 2, if necessary, an acid based clean may be used partly in the water rinse station to remove the residuals from the metal lines, and said acid based clean may be
10 composed of a diluted sulfuric acid with hydrogen peroxide mixture. (Delehanty et al., Patent No. 5,780,363)

In the context of the invention, with the current trend towards the use of dielectric hard mask (silicon
15 dioxide and silicon nitride layers), the integrated gas phase chemistry with the RIE process will be able to remove the polymer rails from the Al/Cu metal lines efficiently.

As can be seen from FIG. 3, microphotographs of
20 X100K depict the array and support region of a DRAM chip obtained using a BCl_3 RIE etch that has been subjected to a mixture of $\text{HF} + \text{NH}_3$ and rinsed, followed by an oxidizing downstream plasma.

Similarly, in FIG. 4, the method of sequence 2 of
25 the present invention depicts the array and support in which, after a BCl_3 RIE etch, the wafer is subjected to water downstream plasma followed by treatment with the gas phase chemistry combination of $\text{HF} + \text{NH}_3$, and thereafter rinsed to obtain the support. In FIG. 4,
30 which shows the results of utilizing sequence 2 of the invention, the microphotographs are shown at X100K.

It is important to note that, the gaseous mixture of HF and NH_3 cannot be used to define the metal lines of Al/Cu. In order to form the Al/Cu metal lines, a
35 chlorine based plasma chemistry is used. Typical sources of the chlorine based plasma are HCl/BCl_3 with Cl_2 gas.

0960406-1003
SECRET 9040260

The composite structure of the material giving rise to the metal lines of Al/Cu are as follows:

Silicon oxide as the interlayer dielectric, a barrier layer, a metal stack layer, and a photo-resist. After the exposure and development of the photo-resist, RIE is done to define the Al/Cu metal line. This leaves behind sidewall polymeric residues that have Al, Si, Ti, O, C and Cl, along with some amounts of the barrier layer elements as well.

In the present invention, the reason for using the particular gas or plasma mixture of HF and NH_3 is that is important to have a good process as a post-clean. In order to have a good process as a post-clean, it is necessary to remove the sidewall polymer which has chlorine in it to prevent enhancement of corrosion of the metal lines, and to etch/chemically modify the residue to be water soluble while simultaneously not etching the metal line itself.

Further, in the present invention, the NH_3 neutralizes most of the free chloride thereby preventing corrosion of the metal lines.

Once the chloride has been neutralized, the HF/ NH_3 then etches/chemically modifies and neutralizes the residue into a water soluble form.

The most significant advantage of the invention process is that it can be interfaced directly with the metal etched tool, where there is a separate chamber that performs this chemistry (either post resist strip or prior to resist strip), thereby allowing a final step of using only deionized water as a rinse.

Accordingly, subjecting the composite structure of silicon oxide as the inter layer dielectric, barrier layer, metal stack layer, and photo-resist layer to the etching/neutralizing gaseous or plasma mixture is a significant advance in the art of preparing microelectronic devices.

While it is to be noted that the preferred embodiments of the invention utilize a Al/Cu metal line in which post-RIE polymer rails formed are removed, it is to be understood that those skilled in the art may effect modifications, inclusive of practicing the invention for metal lines other than Al/Cu without departing from the spirit and scope of the invention.

Having described our invention, we claim as new and desire to secure by Letters Patent, the following:

10

WE CLAIM:

1. A method for removal of post reactive ion
etch sidewall polymer rails on a Al/Cu metal line of a
5 semiconductor or microelectronic composite structure
comprising:

supplying a mixture of an etching gas and an acid
neutralizing gas into a vacuum chamber in which said
composite structure is supported to form a water
10 soluble material of sidewall polymer rails left behind
on the Al/Cu metal line from the RIE process;
removing the water soluble material with deionized
water; and removing photo-resist from said composite
structure by either a water-only plasma process or a
15 chemical down stream etching method.

2. The method of claim 1 wherein said composite
structure comprises a silicon oxide interlayer
dielectric, a barrier layer, a metal stack layer, and a
20 photoresist layer.

3. The method of claim 2 wherein said etching
gas is HF and said acid neutralizing gas is NH_3 .

4. The method of claim 3 wherein removing said
photo-resist accomplished at temperatures greater than
25 200°C.

5. The method of claim 1 wherein said mixture of
said etching gas and said acid neutralizing gas is in
30 the form of a plasma.

6. A method for removal of post ion etch
sidewall polymer rails on a Al/Cu metal line of a
35 semiconductor or microelectronic composite structure
comprising:

B66027-9040360

forming a water-only plasma process to strip the photo-resist layer of a semiconductor or micro-electronic composite structure previously subjected to a RIE process;

5 supplying a mixture of an etching gas and an acid neutralizing gas into a vacuum chamber on which said structure is supported to form a water soluble material of sidewall polymer rails left behind on the Al/Cu metal line from the RIE process; and

10 removing the water soluble material with deionized water.

15 7. The process of claim 6, wherein the water-only plasma process is conducted at temperatures between about 175-275°C to limit the thickness of the sidewall polymer.

20 8. The process of claim 7 wherein said composite structure comprises a silicon oxide interlayer dielectric, a barrier layer, a metal stack layer, and a photo-resist layer.

25 9. The process of claim 8 wherein said etching gas is HF and said acid neutralizing gas is NH₃.

10. The process of claim 6 wherein said mixture of said etching gas and said acid neutralizing gas is in the form of a plasma.

30 11. An integrated metal etch tool operable to perform the method as recited in claim 6.

12. An integrated metal etch tool operable to perform the method as recited in claim 7.

35

ABSTRACT

5 A method for removal of post reactive ion etch
sidewall polymer rails on a Al/Cu metal line of a
semiconductor or microelectronic composite structure
comprising:

10 1) supplying a mixture of an etching gas and an
acid neutralizing gas into a vacuum chamber in which
said composite structure is supported to form a water
soluble material of sidewall polymer rails left behind
on the Al/Cu metal line from the RIE process; removing
the water soluble material with deionized water; and
removing photo-resist from said composite structure by
either a water-only plasma process or a chemical down
stream etching method; or

15 2) forming a water-only plasma process to strip
the photo-resist layer of a semiconductor or micro-
electronic composite structure previously subjected to
a RIE process;

20 supplying a mixture of an etching gas and an acid
neutralizing gas into a vacuum chamber on which said
structure is supported to form a water soluble material
of saidwall polymer rails left behind on the Al/Cu
metal line from the RIE process; and

25 removing the water soluble material with deionized
water.

SECRET "9040260

101 101 101
Original
4-16-78

~5

Sequence 1

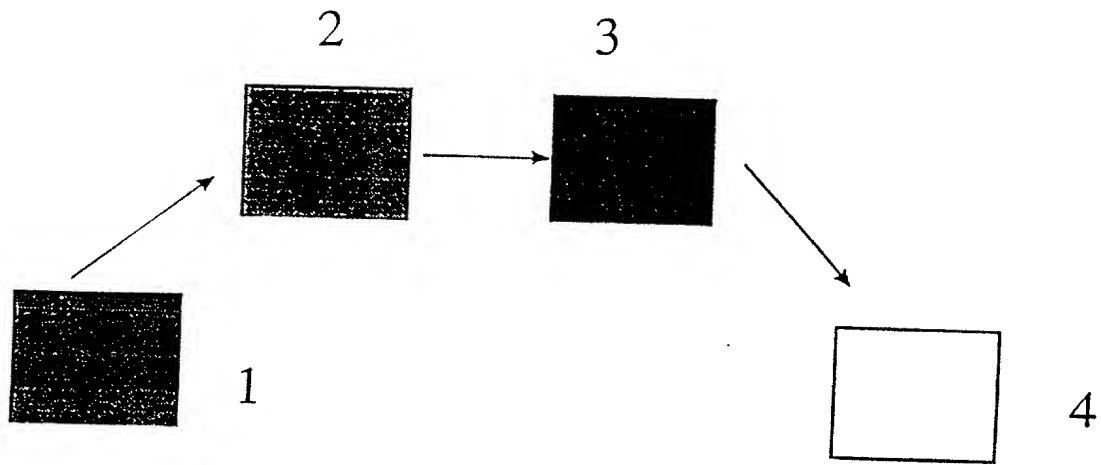


FIG. 1

09204708 120398

SECRET 9040250

Sequence 2

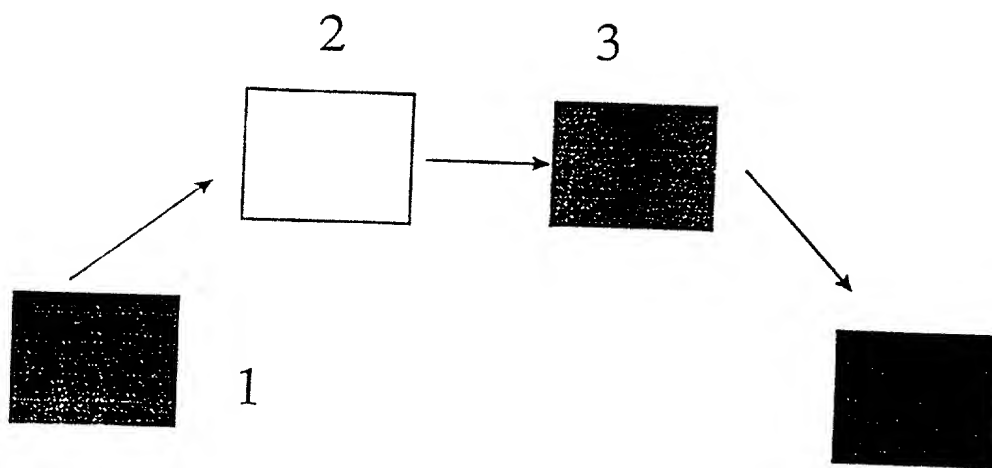



FIG. 2

Sequence I

Array




Support

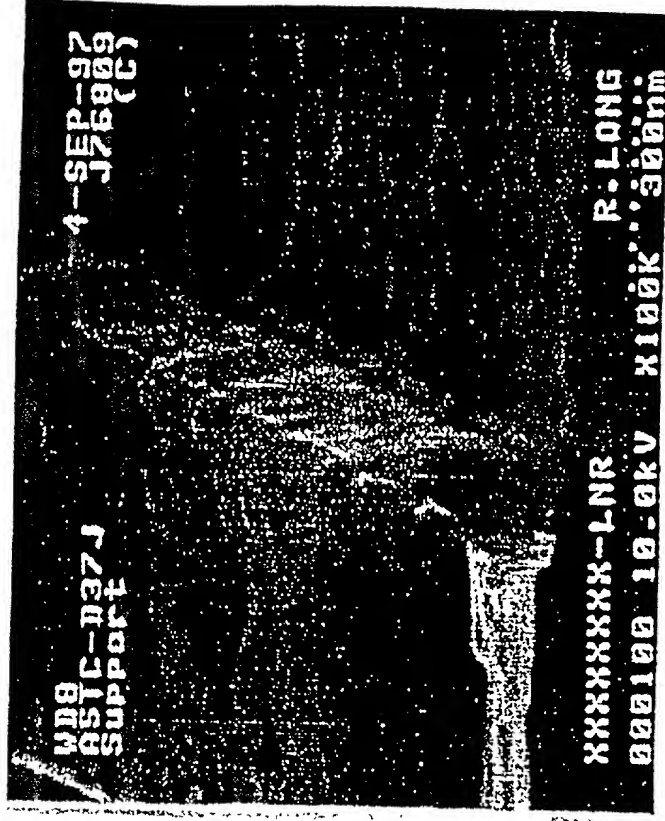


BCl_3 RIE \rightarrow $(\text{HF} + \text{NH}_3)$ \rightarrow Rinse \rightarrow Fusion

FIG. 3

Array

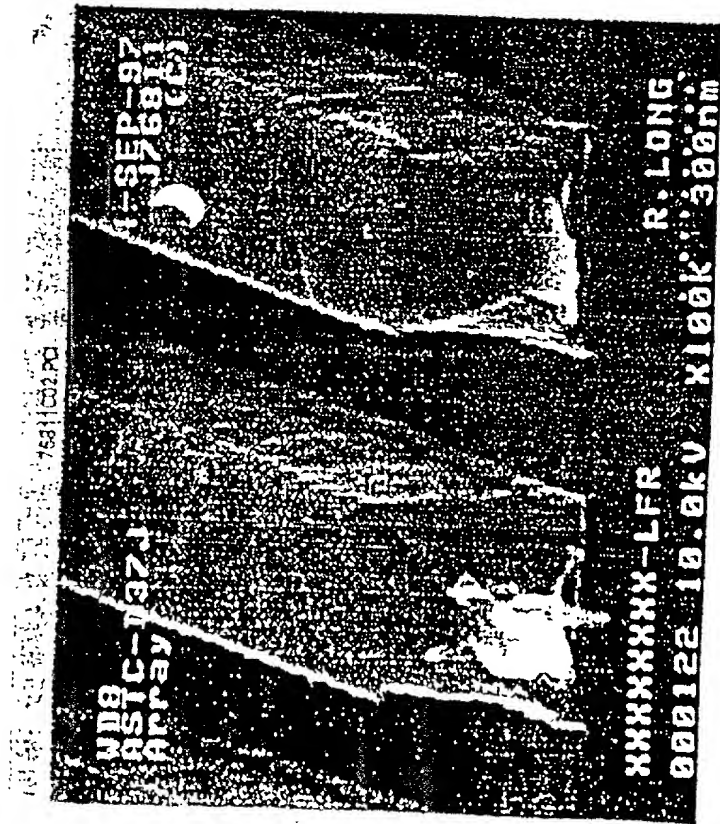

Support

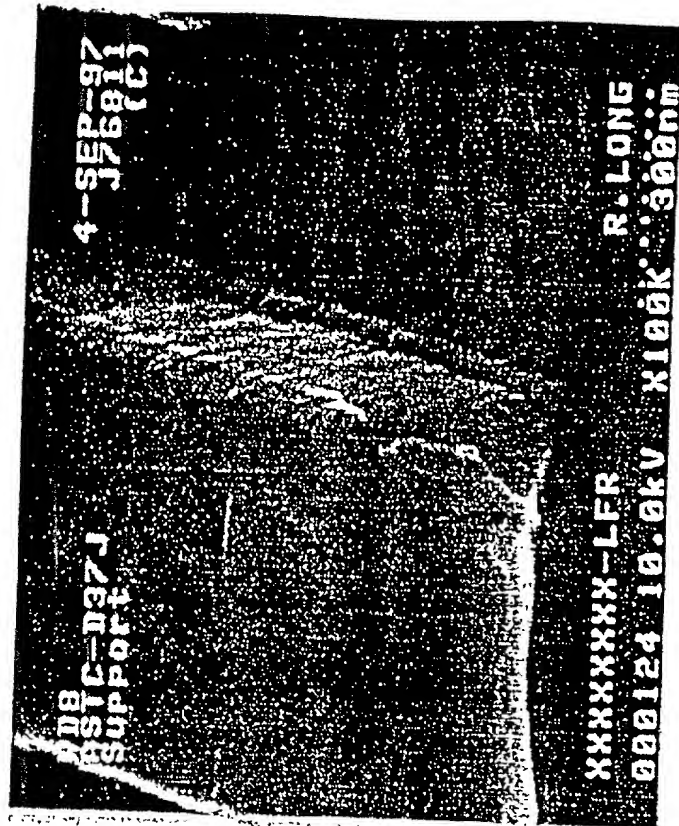

BCl_3 RIE \rightarrow water DSQ \rightarrow (HF + NH_3) \rightarrow Rinse

FIG. 4

DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe we are the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

REMOVAL OF POST-RIE POLYMER ON Al/Cu METAL LINE

the specification of which
X is attached hereto, and
 was filed on _____ as Application Serial No. _____
 and was amended on _____ (if applicable)

Listing of named inventor(s): Ravikumar RAMACHANDRAN; Wesley NATZLE;
 Martin GUTSCHE; Hiroyuki AKATSU; Chien YU

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Codes, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)			Priority claimed	
(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No

I hereby claim the benefits under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

09/061,565	April 16, 1998	Pending
(Application Serial No.)	(Filing date)	(Status)
	(patented, pending, abandoned)	
(Application Serial No.)	(Filing date)	(Status)
	(patented, pending, abandoned)	

09/061,565

Power of Attorney: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Adel A. Ahmed, Reg. No. 29,606; Stanton C. Braden, Reg. No. 32,556; Robert T. Canavan, Reg. No. 37,592; Dexter K. Chin, Reg. No. 38,842; Joseph S. Codispoti, Reg. No. 31,819; Aaron C. Deditch, Reg. No. 33,865; Lawrence C. Edelman, Reg. No. 29,299; Mark H. Jay, Reg. No. 27,507; David W. Laub, Reg. No. 38,708; Peter A. Luccarelli, Jr., Reg. No. 29,750; Jeffrey P. Morris, Reg. No. 25,307; Donald B. Paschburg, Reg. No. 33,753; Jeff Slusher, Reg. No. 34,729; Darryl A. Smith, Reg. No. 37,756; Heather S. Vance, Reg. No. 39,033; Russel C. Wells, Reg. No. 24,188; Robert R. Whitman, Reg. No. 36,966; Ira Lee Zebrak, Reg. No. 31,147

Send correspondence to:

Siemens Corporation
Intellectual Property Department
186 Wood Avenue South
Iselin, NJ 08830

Direct telephone calls to:

Elsa Keller, Legal Administrator (732) 321-3026

I hereby declare that all statements made herein on my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of sole
or first inventor Ravikumar RAMACHANDRAN
Inventor's signature *Ravikumar*
Date November 30, 1998
Residence Beacon, New York
Citizenship India
Post Office Address 9 Hudson View Drive, Beacon, NY 12508

Full name of
second inventor Wesley NATZLE
Inventor's signature *Wesley natzle*
Date November 30, 1998
Residence New Paltz, New York
Citizenship U.S.
Post Office Address 140 Canaan Road, New Paltz, NY 12561

8650227 9040260

Full name of
third inventor Martin GUTSCHE

Inventor's signature _____

Date _____

Residence Neufahrn, Germany

Citizenship Germany

Post Office Address Gardolostr. 2, 85375 Neufahrn, Germany

Full name of
fourth inventor Hiroyuki AKATSU

Inventor's signature 


Date 12/1/98

Residence Yorktown Heights, New York

Citizenship Japan

Post Office Address 37 Wellington Court, Yorktown Heights, NY 10598

Full name of
fifth inventor Chien YU

Inventor's signature 

Date 11/30/1998

Residence Highland Mills, New York

Citizenship U.S.

Post Office Address 97 Jefferson Street, Highland Mills, NY 10930

0920406 12098

DECLARATION FOR PATENT APPLICATION & POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe we are the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

REMOVAL OF POST-RIE POLYMER ON Al/Cu METAL LINE

the specification of which

X is attached hereto, and

was filed on _____ as Application Serial No. _____
and was amended on _____ (if applicable)

Listing of named inventor(s): Ravikumar RAMACHANDRAN; Wesley NATZLE; Martin GUTSCHE; Hiroyuki AKATSU; Chien YU

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Codes, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

Priority claimed

(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No
(Number)	(Country)	(Day/month/year filed)	Yes	No

I hereby claim the benefits under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, we acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

09/061,565	April 16, 1998	Pending
(Application Serial No.)	(Filing date)	(Status)
		(patented, pending, abandoned)
(Application Serial No.)	(Filing date)	(Status)
		(patented, pending, abandoned)

09/061,565 "40260"

Adel A. Ahmed, Reg. No. 29,606; Stanton C. Braden, Reg. No. 32,556; Robert T. Canavan, Reg. No. 37,592; Dexter K. Chin, Reg. No. 38,842; Joseph S. Codispoti, Reg. No. 31,819; Aaron C. Deditch, Reg. No. 33,865; Lawrence C. Edelman, Reg. No. 29,299; Mark H. Jay, Reg. No. 27,507; David W. Laub, Reg. No. 38,708; Peter A. Luccarelli, Jr., Reg. No. 29,750; Jeffrey P. Morris, Reg. No. 25,307; Donald B. Paschburg, Reg. No. 33,753; Jeff Slusher, Reg. No. 34,729; Darryl A. Smith, Reg. No. 37,756; Heather S. Vance, Reg. No. 39,033; Russel C. Wells, Reg. No. 24,188; Robert R. Whitman, Reg. No. 36,966; Ira Lee Zebrak, Reg. No. 31,147

Siemens Corporation
Intellectual Property Department
186 Wood Avenue South
Iselin, NJ 08830

Elsa Keller, Legal Administrator (732) 321-3026

I hereby declare that all statements made herein on my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Post Office Address 9 Hudson View Drive, Beacon, NY 12508

Post Office Address 140 Canaan Road, New Paltz, NY 12561

Date 11-16-98

Residence Neufahrn, Germany

Citizenship Germany

Post Office Address Gardolotr. 2, 85375 Neufahrn, Germany

Inventor's signature

Date _____

Residence Yorktown Heights, New York

Citizenship Japan

Post Office Address 37 Wellington Court, Yorktown Heights, NY 10598

Inventor's signature _____

Date _____

Residence Highland Mills, New York

Citizenship U.S.

Post Office Address 97 Jefferson Street, Highland Mills, NY 10930